

Chemical Transfer Pump

Braude Self Priming Chemical Transfer Pump

Braude chemical pumps are designed for pumping corrosive chemicals such as hydrochloric, hydrofluoric, nitric and sulphuric acids. The pumps are constructed from high integrity polymers which have high chemical and impact resistance

The pump has an integral self priming chamber increasing ease of use and suction lift up to 3.5m making it ideal for emptying settlement tanks.

Flow rates to 35M³/hr up to 17m head



Used By

- Steel Strip Manufacturers
- Wire & Tube Manufacturers
- Metal Finishers
- Chemical Plants
- Galvanising Industry
- Aerospace Industry
- Chemical Millers
- Glass Producers

Main Features

- Integral Self priming chamber
- Lightweight and robust
- Operating temperature up to 100°C
- Corrosion and stain resistant
- High flow rate - up to 35m³/Hr
- High efficiency closed impeller
- Choice of mechanical seals to suit application
- Easy maintenance
- Leak proof union connections with adaptors available for existing BSP

BRAUDE Products will not corrode


Braude Self Priming Chemical Pump

A choice of mechanical seals is available: the Braude non metallic seal with its unique viton bellows, for chemical service, or stainless steel for less arduous applications. Six motor sizes are available from 0.25kW to 1.5kW, all are rated to IP55 giving flow rates up to 30 M3/hr. All pumps are supplied with clear installation instructions, and Braude technical staff are always available to offer advice


Technical data

| Model No | Hp/Kw | Max Head | Flow At 10m head m ³ /hr | Total Dynamic Head | Max Suction Lift | Weight (kg) Single Phase | Three Phase | Length (mm) Single Phase | Three Phase | Rated Current At 230V | 400v |
|----------|-----------|----------|-------------------------------------|--------------------|------------------|--------------------------|-------------|--------------------------|-------------|-----------------------|------|
| J50ECX | 0.33/0.25 | 10.8M | 1.7 | 12.5M | 2.9M | 10.7 | 10.2 | 548 | 548 | 2.3A | 0.8A |
| J75ECX | 0.5/0.37 | 3.0M | 5.1 | 15.9M | 2.6M | 10.8 | 10.25 | 548 | 548 | 2.7A | 1A |
| J100ECX | 0.75/0.55 | 13.6M | 7.5r | 17.25M | 3M | 13.55 | 12.5 | 548 | 545 | 3.2A | 1.1A |
| J150ECX | 1/0.75 | 14.0M | 12.6 | 18.25M | 2.7M | 15.0 | 14.0 | 578 | 578 | 3.5A | 1.8A |
| J200ECX | 1.5/1.12 | 18.6M | 16.8 | 19.8M | 3.5M | 16.5 | 15.0 | 578 | 575 | 5.7A | 2.4A |
| J250ECX | 2/1.5 | 18.8M | 23.2 | 19.8M | 3.5 | 20.0 | 19.0 | 578 | 582 | 7.5A | 3.4A |

| | |
|----------------------------------|------------------------|
| Connections | 2 X 63mm Union (2 3/4" |
| Inlet And Outlet | BSP Threaded) |
| Minimum Pipe Size | 63mm OD |
| Always use PVC or PP | 50mm ID |
| Max Solution Pumping Temperature | 100 Deg C |
| WIDTH 198 MM HEIGHT 295 MM | Motor Speed 2800 rpm |

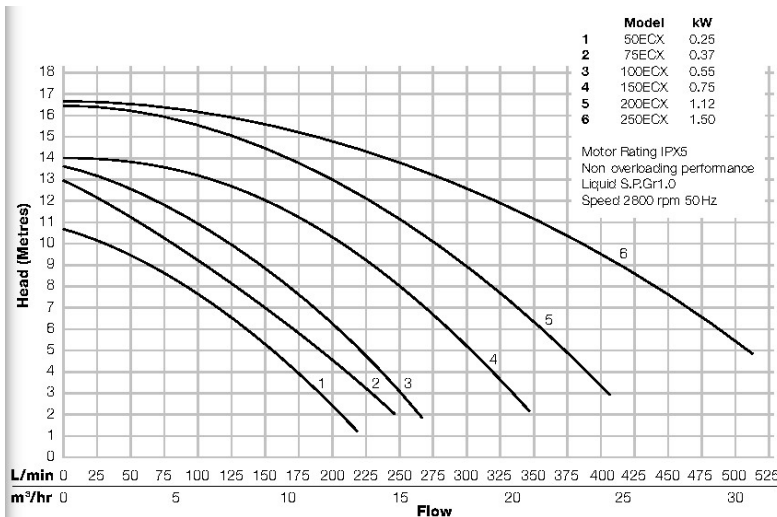

The Braude Self Priming Pump is reliable, and easy to maintain. We hold a large stock of spare parts and All pumps are supplied with clear installation, operating and maintenance instructions, and Braude technical staff are always available to offer advice.

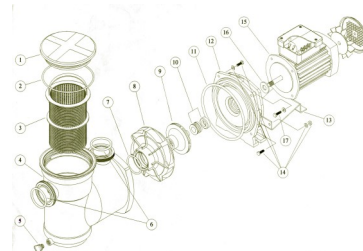

Thermal Process
Equipment Specialists

BRAUDE a trading division of
Heatrod Elements Ltd
Unit 5, Wellington Business Park,
Dukes Ride,
CROWTHORNE, Berkshire RG45 6LS.
UK

Tel: +44 (0)1252 876123
www.braude.co.uk
sales@braude.co.uk
VAT: UK628867390