


## Up to 50% Fuel Saving & Noise Reduction\* Double Life Span

\* Fuel consumption and engine noise are half of 2-stroke engine.



### Performance Curve

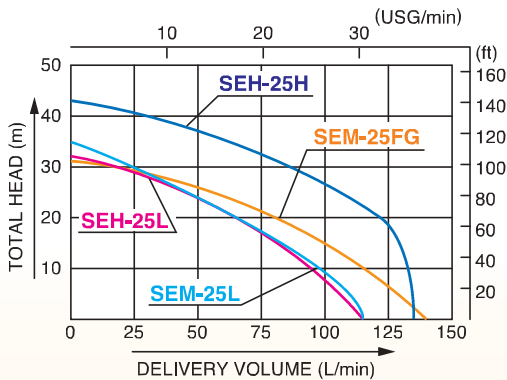

SEH-25H



SEM-25L



SEH-25L

### Available 25 mm Hose Set

#### N-Type Hose Set

- Washing of agriculture & construction machinery



- 1 Discharge hose <8 m (26 ft)>
- 1 Nozzle (Jet)

#### R-Type Hose Set

- Washing of agriculture machinery
- Water sprinkling to the field



- 1 Discharge hose <8 m (26 ft)>
- 1 Nozzle (Jet & Mist)

### New Spray Nozzle



#### SJ-20

- Large volume of spraying water
- 1 Coupling set <20 mm (3/4")>
- 1 Hose nipple <20 mm (3/4") x 15 mm (1/2")>



### Specifications

Model		SEH-25L	SEH-25H	SEM-25L	SEM-25FG
PUMP	Connection Dia	25 mm (1")			
	Connection Thread	Outer Pipe Thread BSP			
	Total Head	32 m (105 ft)	43 m (141 ft)	35 m (115 ft)	31 m (102 ft)
	Delivery Volume	115 L/min (30 USG/min)	135 L/min (36 USG/min)	115 L/min (30 USG/min)	140 L/min (37 USG/min)
	Max. Suction Lift	8 m (26 ft)			
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine		Forced Air-cooled 2-stroke Gasoline Engine	Forced Air-cooled 4-stroke Gasoline Engine
	Model	Honda GX25	Honda GXH50	Mitsubishi TU26	Mitsubishi GT241
	Exhaust Volume	25 cc	49 cc	25.6 cc	79.6 cc
	Rated Output	—		—	1.3 kW (1.8 PS) / 3600 rpm
	Max. Output	0.81 kW (1.1 PS) / 7000 rpm	1.8 kW (2.5 PS) / 7000 rpm	1.03 kW (1.4 PS) / 7500 rpm	1.8 kW (2.4 PS)
	Fuel	Automotive Unleaded Gasoline		2 Stroke Mixed Gas and Oil (25:1)	Automotive Unleaded Gasoline
	Fuel Tank Capacity	0.55 L (0.14 USG)	0.9 L (0.24 USG)	0.6 L (0.16 USG)	1.6 L (0.42 USG)
	Continuous Operating Time	Approx. 1 hrs		Approx. 50 min	Approx. 2 hrs
	Starting Method	Recoil Starter			
	Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set			
Gross Weight	7 kg (15.4 lbs)	13.5 kg (29.7 lbs)	6.5 kg (14.3 lbs)	18 kg (39.7 lbs)	
Dimensions LxWxH (mm)	375 x 243 x 320	385 x 311 x 453	330 x 245 x 325	485 x 325 x 385	
Packing Unit	1				