


FEATURES/CARATTERISTICHE




Materials available/Materiali disponibili:	PP; PVDF
Max flow/Portata massima:	13 m ³ /h
Max head/Prevalenza massima:	14 m
Max temperature/Temperatura massima:	PP 60°C; PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Pump weight/Peso pompa:	PP: 2.6 Kg; PVDF: 2.9 Kg
Motor weight/Peso motore (approx.):	0.55kW: 8.8 Kg


SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

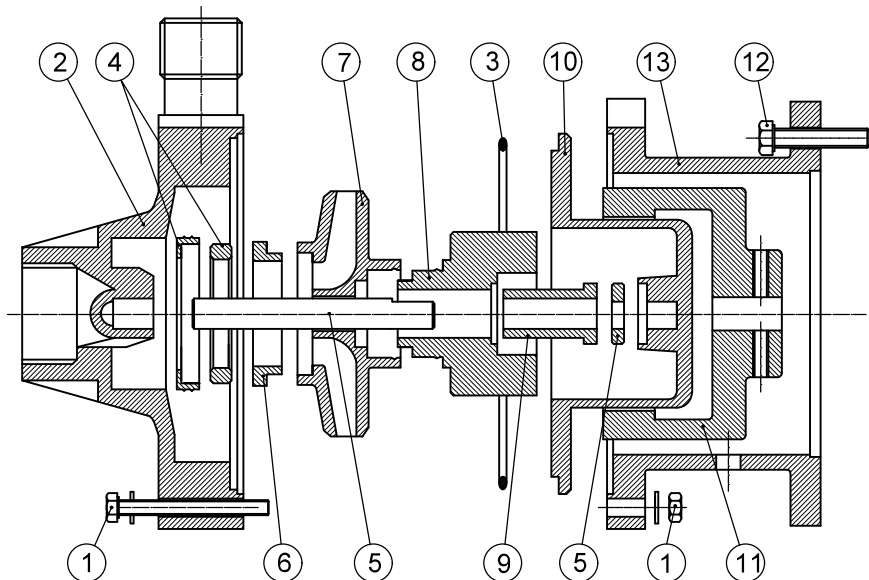

POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART DESOR.	SET SCREWS	FRONT CASING	O-RING	CASING THRUST BUSH	SHAFT RING	IMPELLER THRUST BEARING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MATERIALS	ALSI304	PP+CF PVDF+CF	EPDM VITON	Al ₂ O ₃ EPDM VITON	Al ₂ O ₃	PTFEC	PP PVDF	PP PVDF NdFeB	PTFEC	PP+CF PVDF+CF	Fe NdFeB	ALSI304	PP

CURVES/CURVE 50HZ-2900 RPM

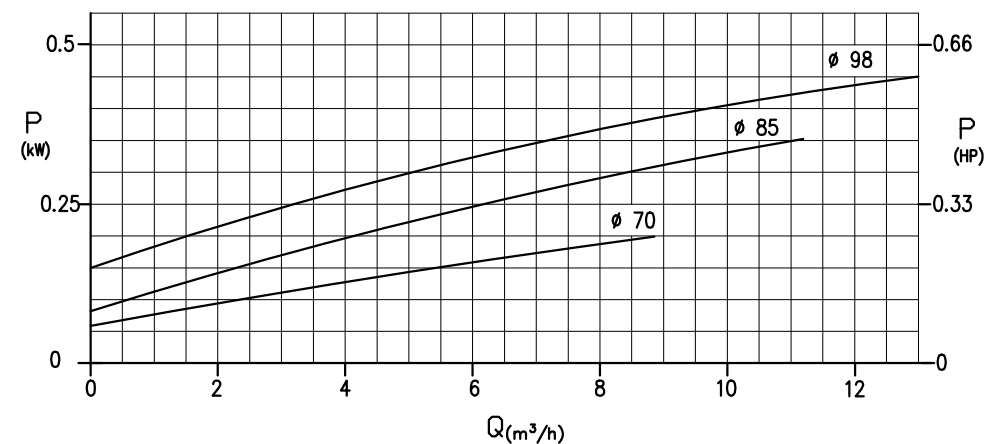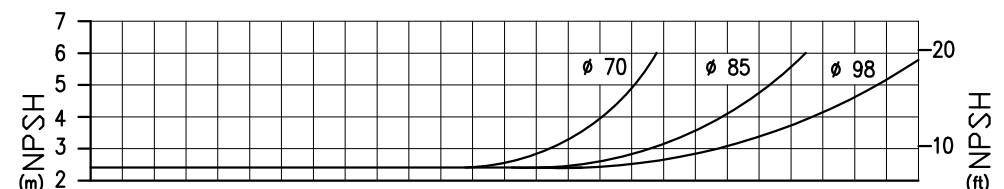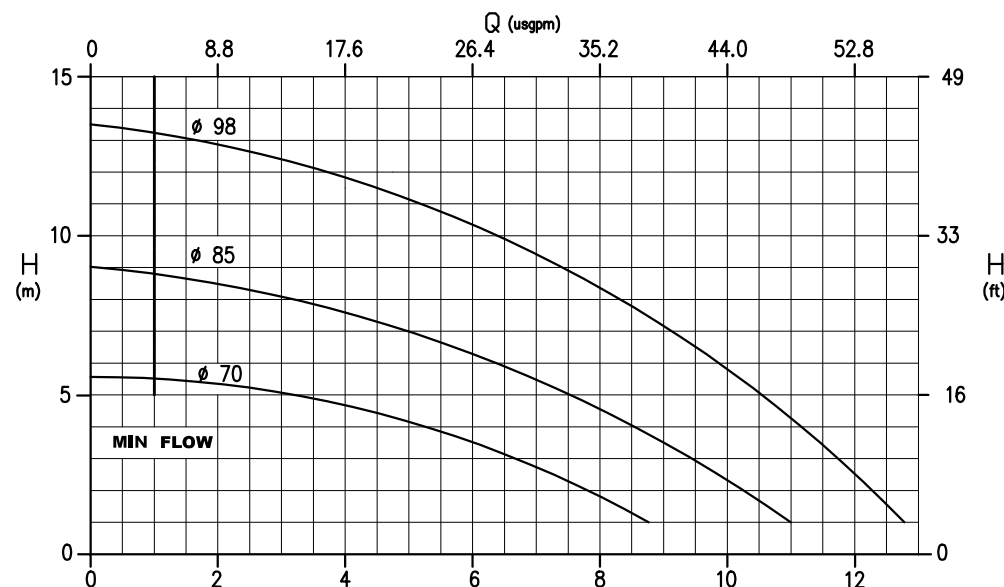


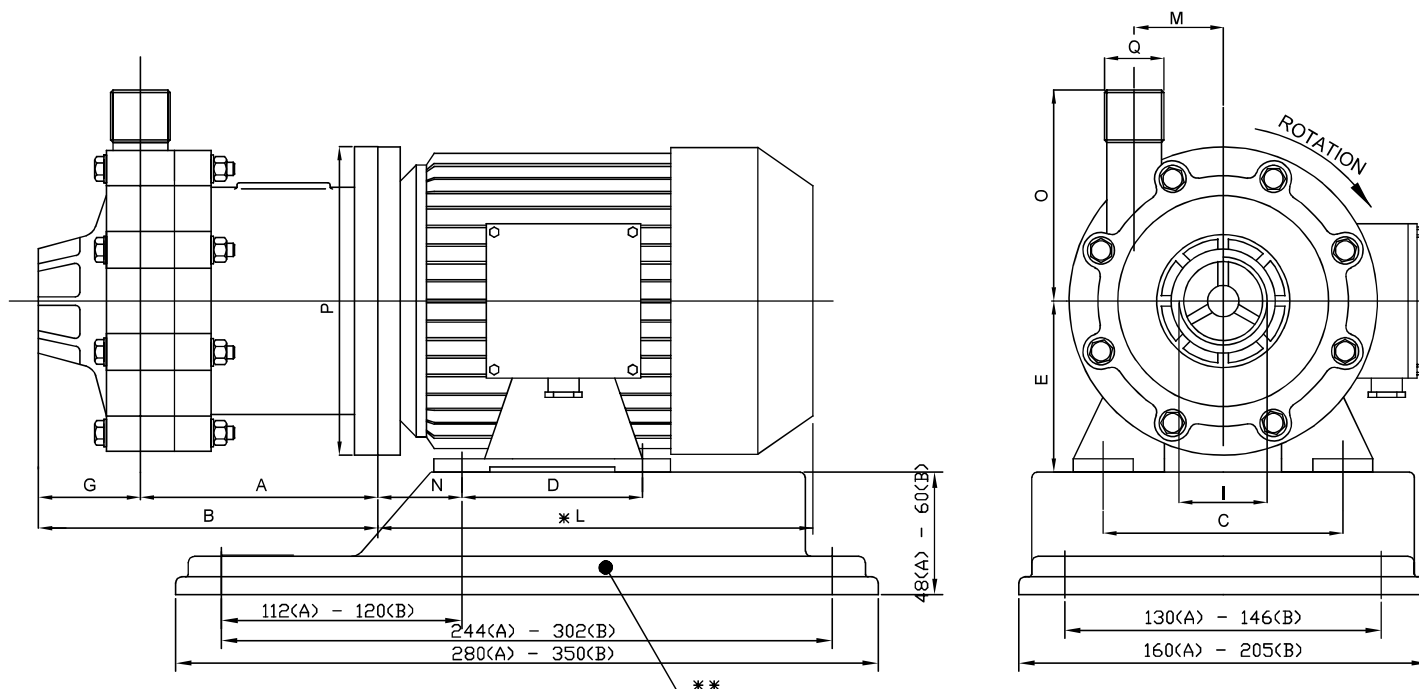


MOTOR SIZE 71 BASE TYPE (A)
MOTOR SIZE 80 BASE TYPE (B)

PUMP TYPE	MOTOR FLANGE B3 - B5	POT kW	BASE TYPE	DIMENSIONS - mm -												
				A	B	C	D	E	G	I	*L	M	N	O	P	Q
HTM 10	G 71 2B	0.55	A	112	180	112	90	71	70	1"1/2 FEMALE	215	45	45	100	160	1" MALE
HTM 10	G 80 B	1.1	B	122	190	125	100	80	70	1"1/2 FEMALE	232	45	50	100	200	1" MALE

* Different according to the manufacturer / Diverso a seconda del fornitore

** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio - Flanges/Flange

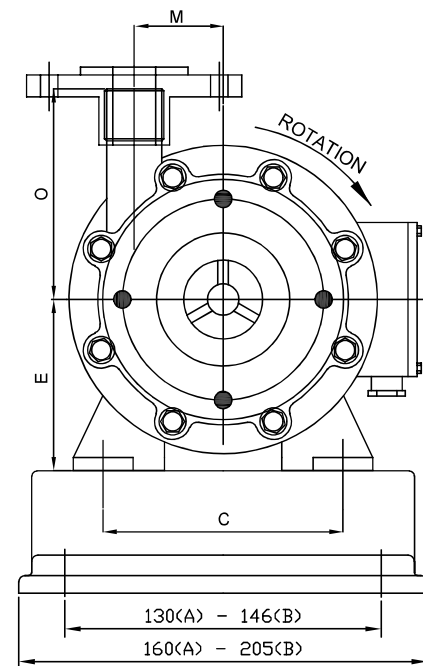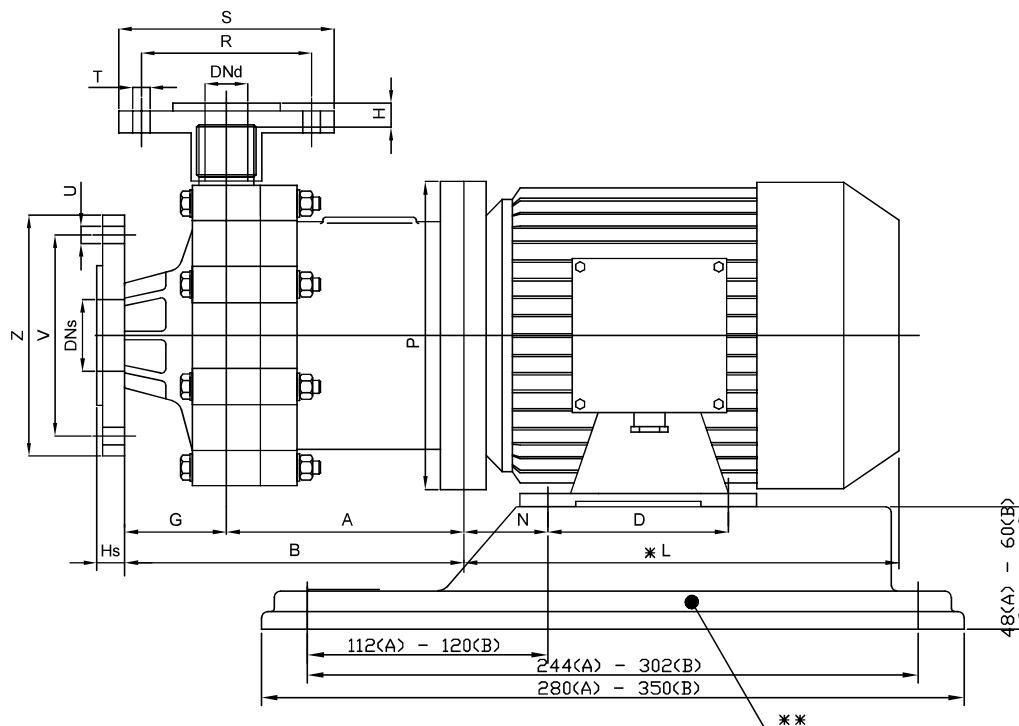

MOTOR SIZE 71 BASE TYPE (A)
MOTOR SIZE 80 BASE TYPE (B)

PUMP TYPE	MOTOR FLANGE B3 – B5	POT kW	BASE TYPE	DIMENSIONS – mm –												FLANGES DIN PN 10–DIMENSIONS – mm –								
				A	B	C	D	E	Hs	G	H	✱L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd
HTM 10	G 71 2B	0.55	A	112	180	112	90	71	34	70	5	215	45	45	100	160	85	115	14	18	110	150	40	25
HTM 10	G 80 B	1.1	B	122	190	125	100	80	34	70	5	232	45	50	100	200	85	115	14	18	110	150	40	25

* Different according to the manufacturer / Diverso a seconda del fornitore
** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio