


FEATURES/CARATTERISTICHE




Materials available/Materiali disponibili:	PP; PVDF
Max flow/Portata massima:	3.5 m ³ /h
Max head/Prevalenza massima:	7 m
Max temperature/Temperatura massima:	PP 60°C; PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Pump weight/Peso pompa:	PP: 0.95Kg; PVDF: 1.05Kg
Motor weight/Peso motore (approx.):	0.12 kW: 3.3 Kg


SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

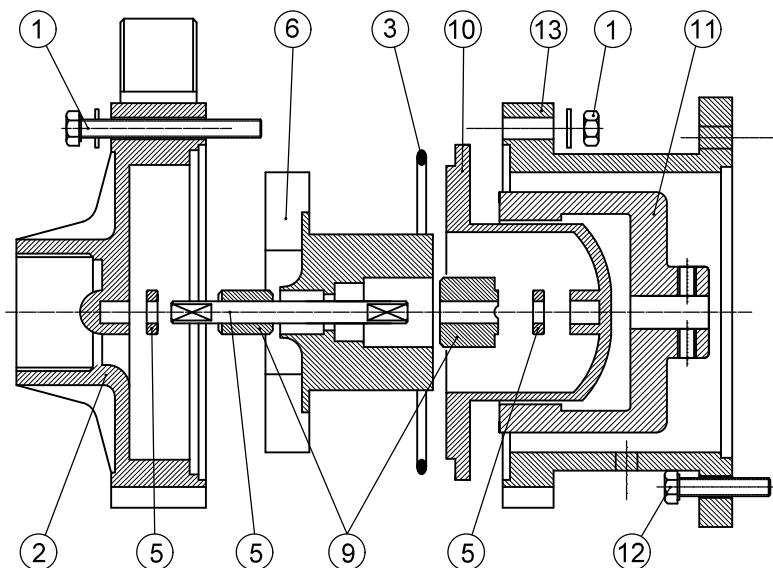

POS.	1	2	3	5	6	9	10	11	12	13
PART DESCR.	SET SCREWS	PUMP HEAD	O - RING	SHAFT + RING	IMPELLER-INTERNAL MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	AISI304	PP+GF PVDF+CF	EPDM VITON	Al ₂ O ₃	PP PVDF NdFeB	PTFEC	PP+GF PVDF+CF	C40 NdFeB	AISI304	PP

CURVES/CURVE 50HZ-2900 RPM

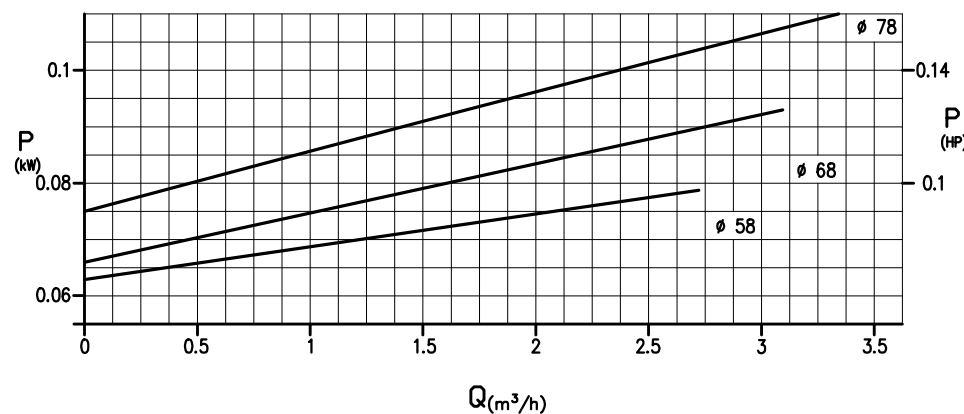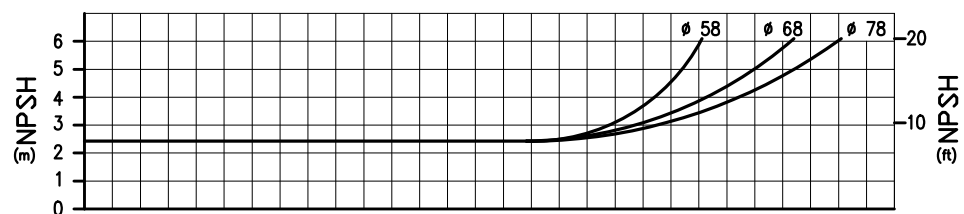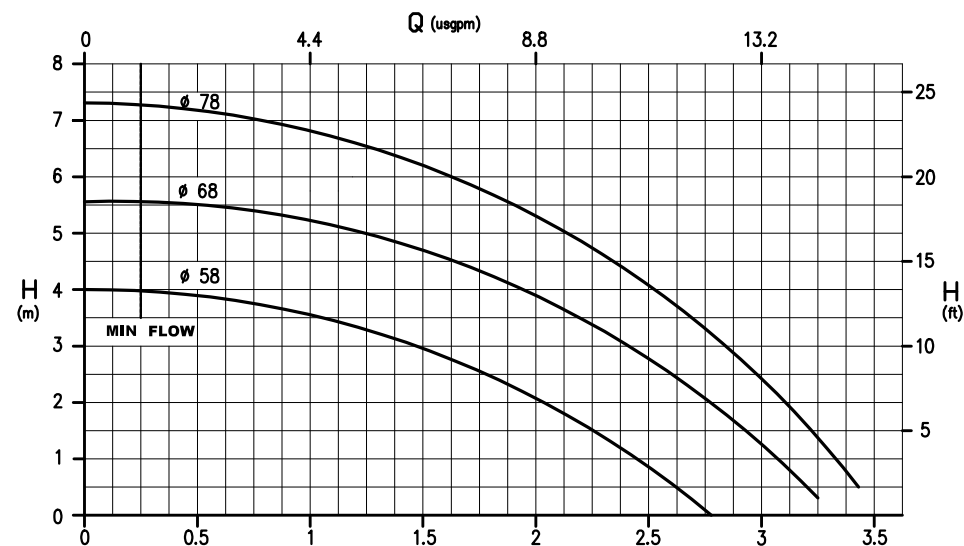

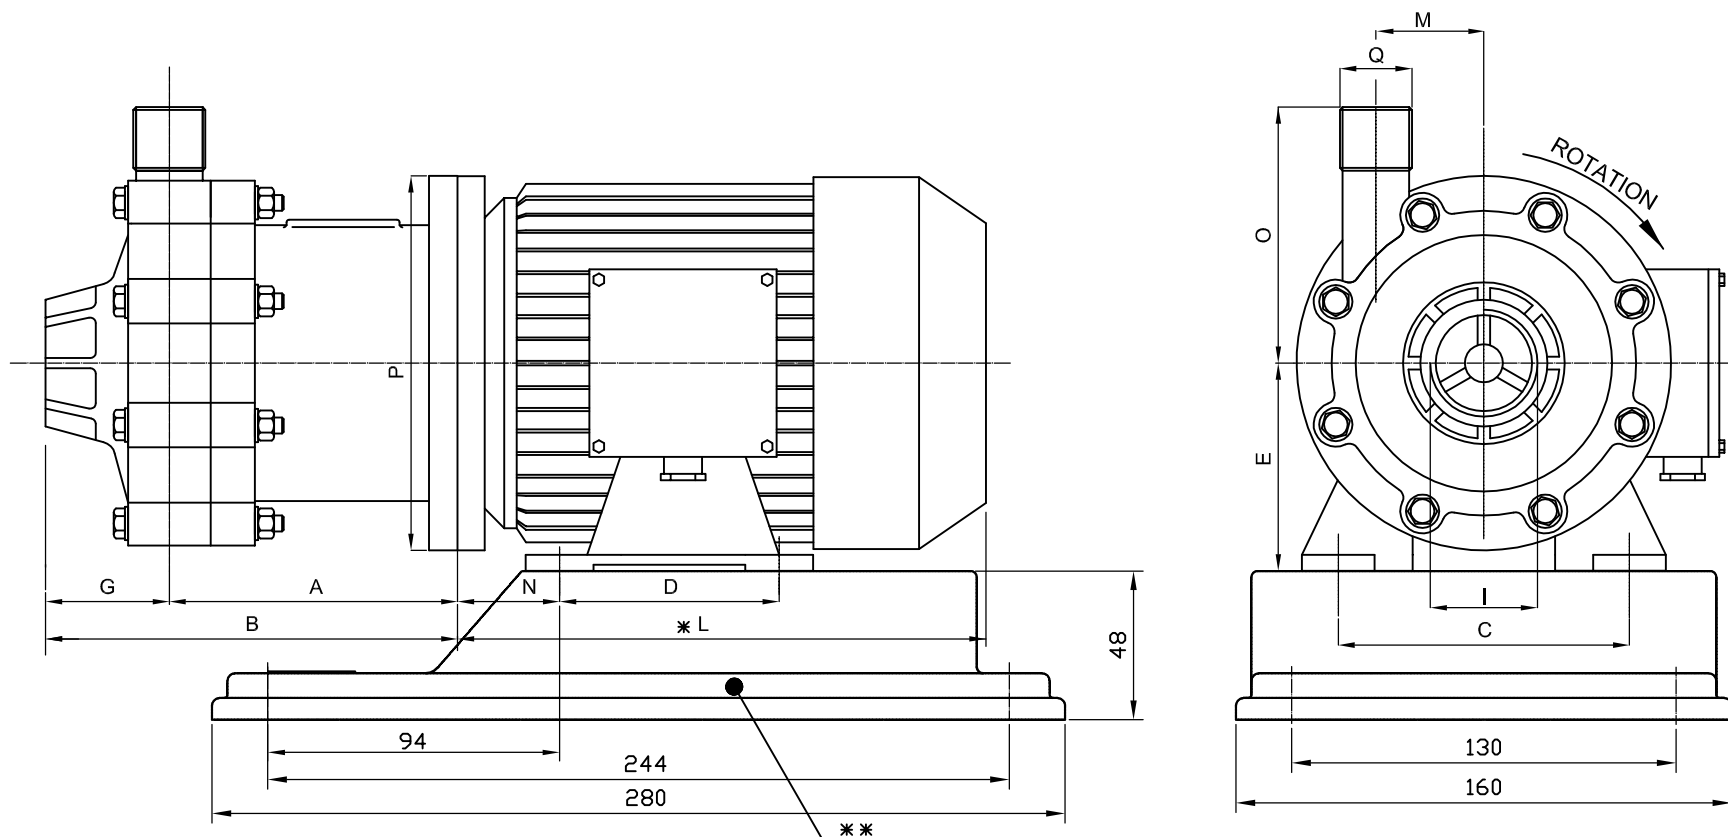

PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -												
			A	B	C	D	E	G	I	*L	M	N	O	P	Q
HTM 4	G 56 B	0.12	76	115	90	71	56	39	1" FEMALE	176	34	36	80	120	1/2" MALE

* Different according to the manufacturer / Diverso a seconda del fornitore
** OPTIONAL UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio