


FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP; PVDF
Max flow/Portata massima:	43 m ³ /h
Max head/Prevalenza massima:	33 m
Max temperature/Temperatura massima:	PP 60°C; PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Pump weight/Peso pompa:	PP: 32.2 Kg; PVDF: 35 Kg
Motor weight/Peso motore (approx.):	5.5 kW: 39 Kg 7.5 kW: 39 Kg



SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

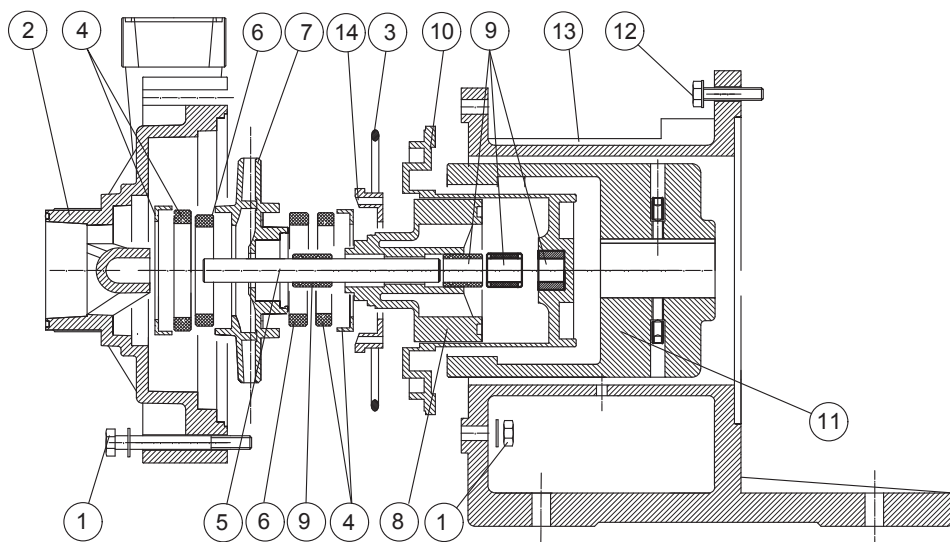

POS.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	CASING THRUST BUSH	SHAFT	IMPELLER THRUST BEARING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET	REAR SUPPORT
MATERIALS	ALSI304	PP+GF PVDF+CF	EPDM VITON	AI2O3 EPDM VITON	AI2O3	PTFEC	PP PVDF	PP PVDF NdFeB	PTFEC	PP+GF PVDF+CF	C40 NdFeB	ALSI304	ALLUMINIUM	PP PVDF

CURVES/CURVE 50HZ-2900 RPM


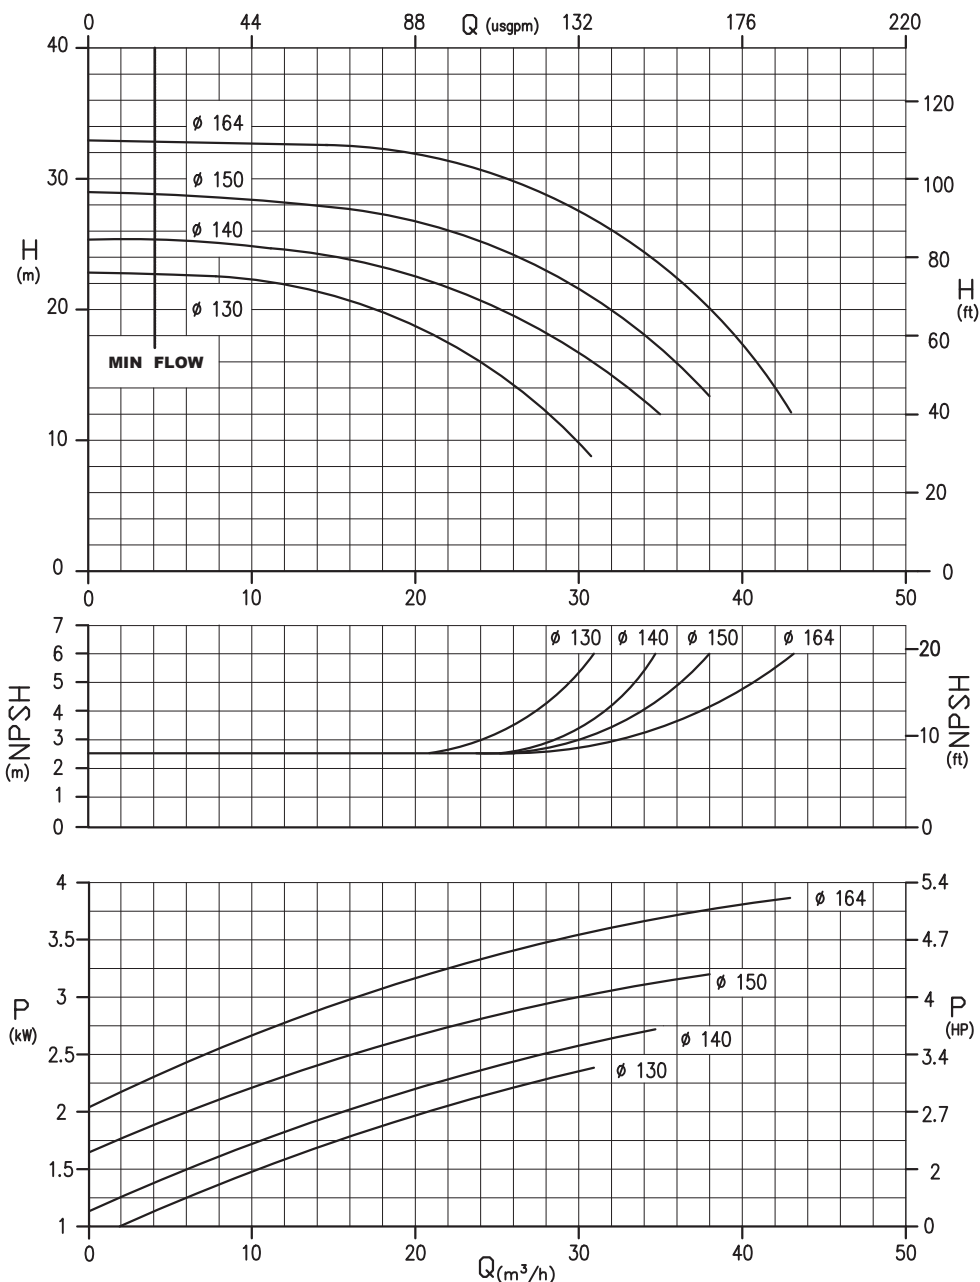


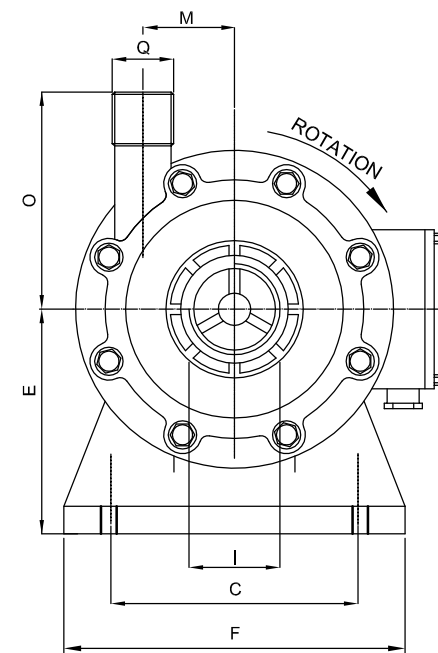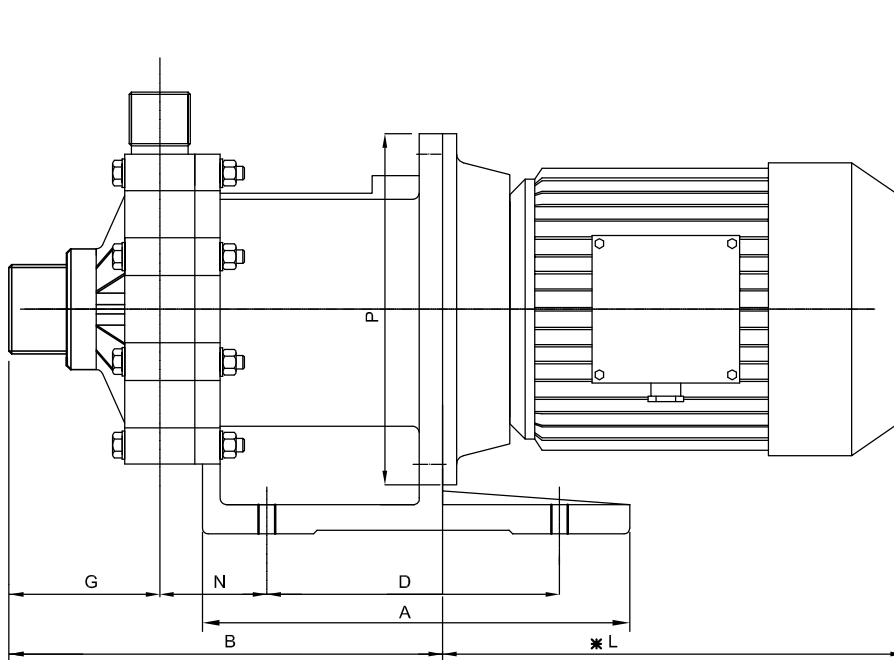

PUMP TYPE	MOTOR FLANGE B5	POT. Kw	DIMENSIONS - mm -													
			A	B	C	D	E	F	G	I	✱L	M	N	O	P	Q
HTM 50	G 132S2A	5.5	365	339	216	250	192	274	92	3"	383	82.5	98	170	300	2 1/2"
HTM 50	G 132S2B	7.5								MALE	421					

* Different according to the manufacturer / Diverso a seconda del fornitore

** OPTIONAL-UPON REQUEST/SU RICHIESTA: Flanges/Flange

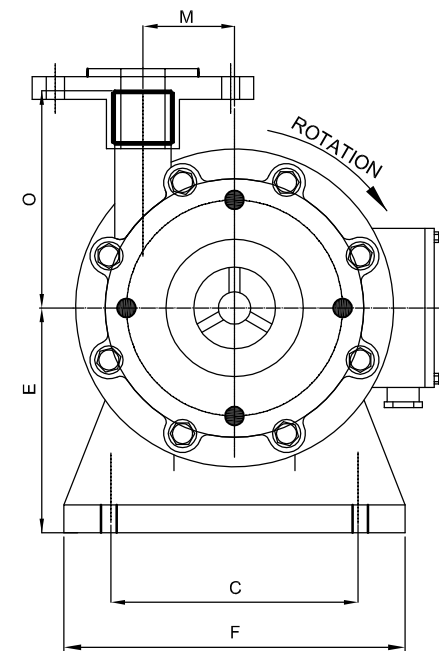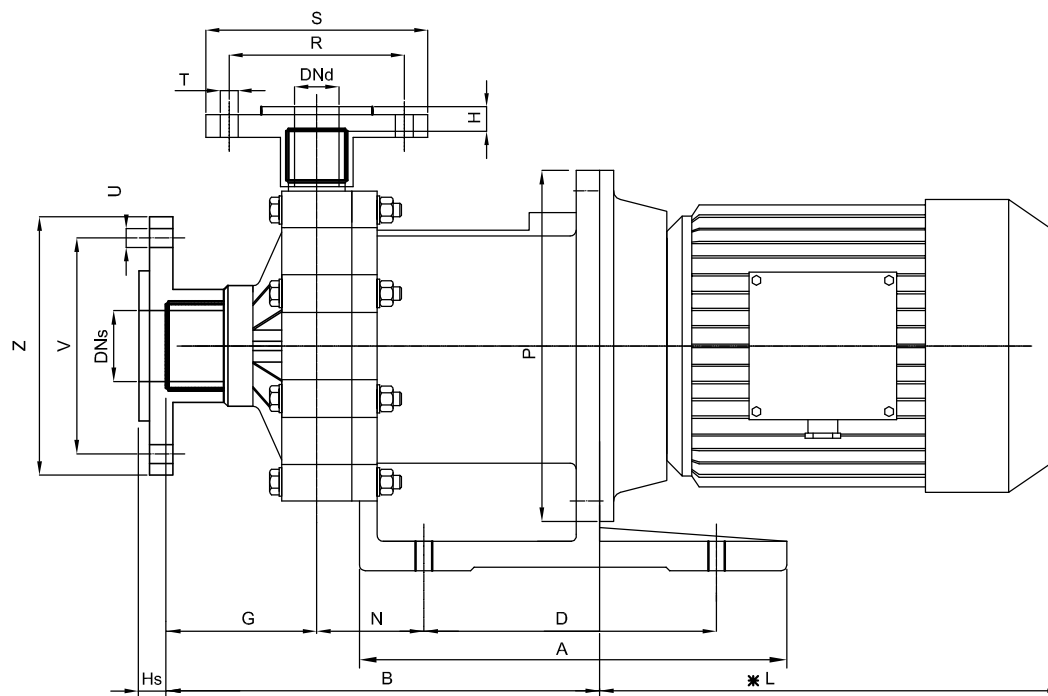

PUMP TYPE	MOTOR FLANGE B5	POT. Kw	DIMENSIONS – mm –														FLANGES DIN PN 10–DIMENSIONS – mm –							
			A	B	C	D	E	F	G	H	Hs	✱L	M	N	O	P	R	S	T	U	V	Z	DNs	DNc
HTM 50	G 132S2A	5.5	365	339	216	250	192	274	92	10	10	383	82.5	98	170	300	145	188	18	18	160	203	80	65
HTM 50	G 132S2B	7.5										421												

* Different according to the manufacturer / Diverso a seconda del fornitore