


FEATURES/CARATTERISTICHE




Materials available/Materiali disponibili:	PP; PVDF
Max flow/Portata massima:	6.5 m ³ /h
Max head/Prevalenza massima:	8.5 m
Max temperature/Temperatura massima:	PP 60°C; PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Pump weight/Peso pompa:	PP:1.6 Kg; PVDF:1.8 Kg
Motor weight/Peso motore (approx.):	0.25kW: 4.4 Kg


SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

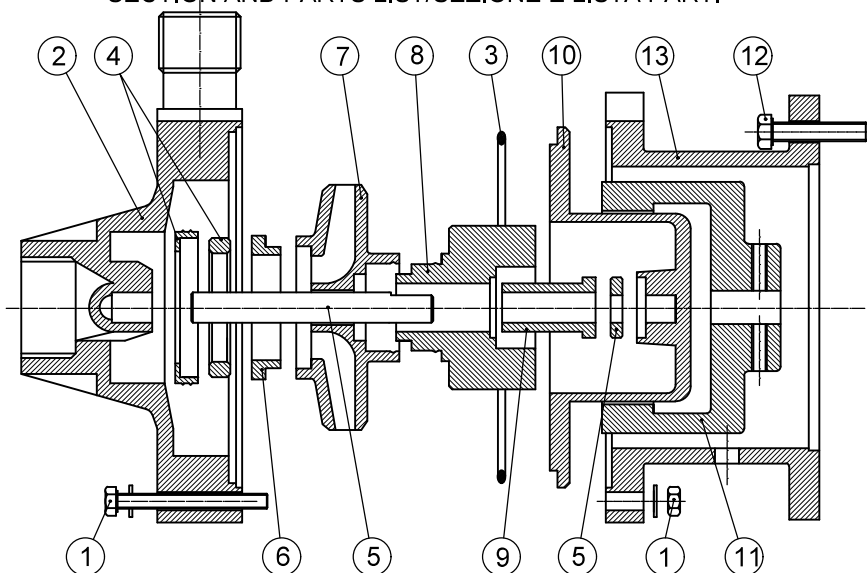

POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	CASING THRUST BUSH	SHAFT RING	IMPELLER THRUST BEARING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MATERIALS	ALSI304	PP+GF PVDF+CF	EPDM VITON	Al2O3 EPDM VITON	Al2O3	PTFEC	PP PVDF	PP PVDF NdFeB	PTFEC	PP+GF PVDF+CF	Fe NdFeB	ALSI304	PP


CURVES/CURVE 50HZ-2900 RPM

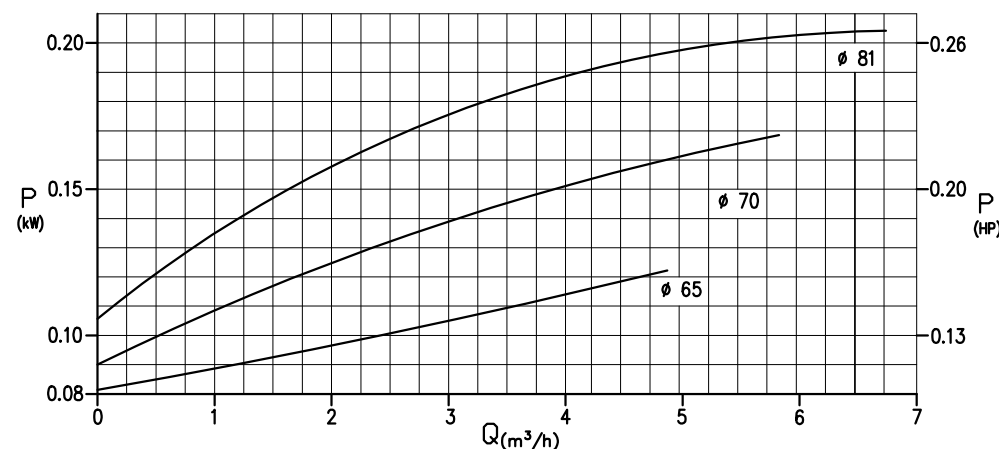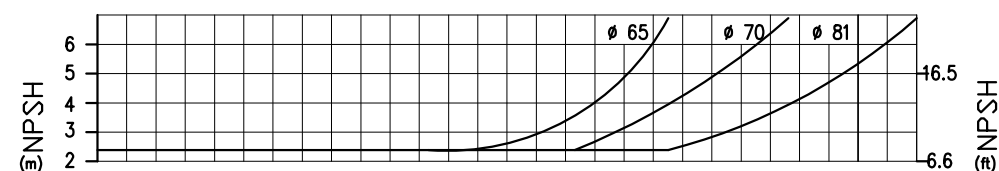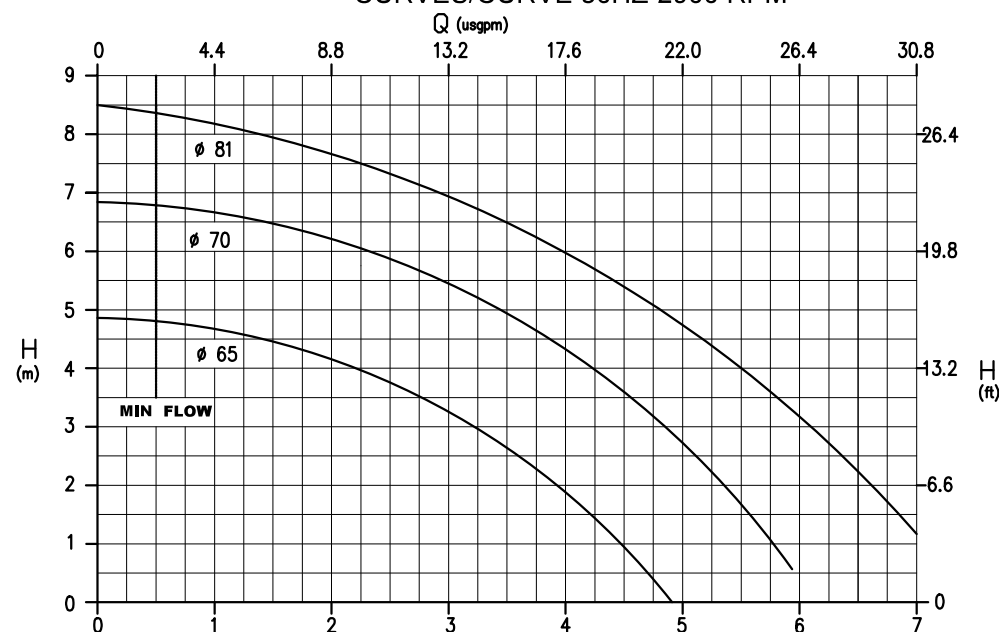

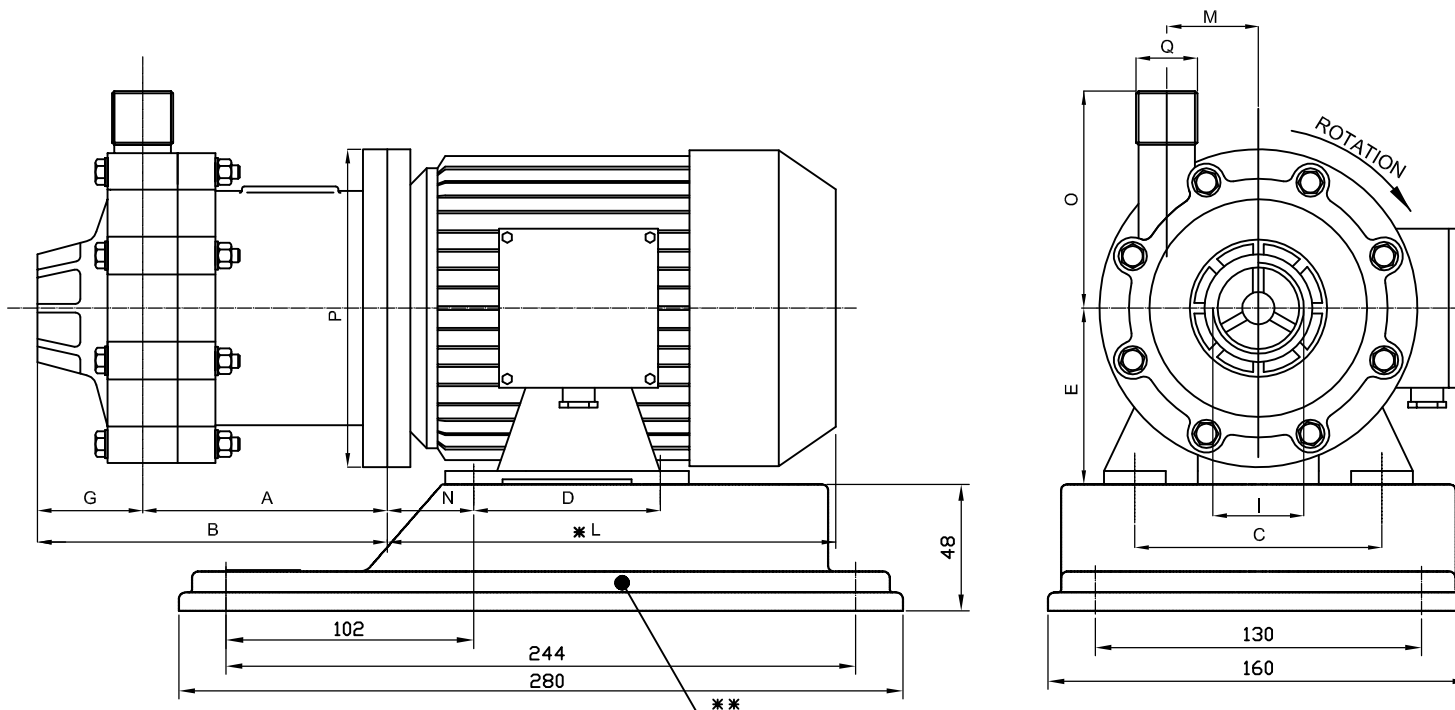

PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -												
			A	B	C	D	E	G	I	*L	M	N	O	P	Q
HTM 6	G 63 B	0.25	85	143	100	80	63	59	1" FEMALE	191	45	40	98	140	3/4" MALE

* Different according to the manufacturer / Diverso a seconda del fornitore
 ** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio - Flanges/Flange

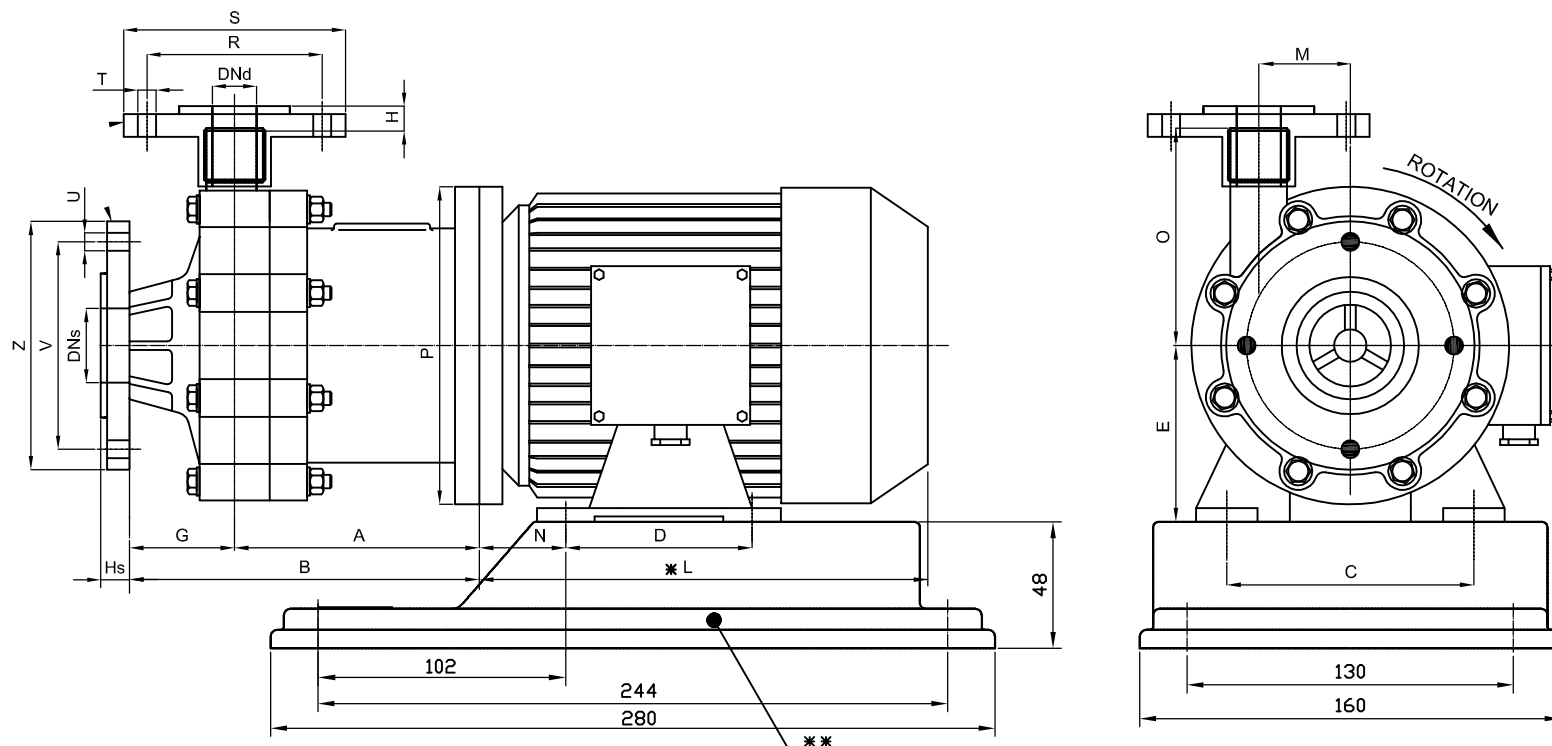

PUMP TYPE	MOTOR FLANGE B3–B5	POT. Kw	DIMENSIONS – mm –													FLANGES DIN PN 10–DIMENSIONS – mm –							
			A	B	C	D	E	G	H	Hs	※L	M	N	O	P	R	S	T	U	V	Z	DNs	DNc
HTM 6	G 63 B	0.25	85	143	100	80	63	59	6	22	191	45	40	98	140	75	105	14	14	85	115	25	20

* Different according to the manufacturer / Diverso a seconda del fornitore
** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio