

L10 Peristaltic Pump

www.enviroflexpumps.com | +44 (0) 1332 913 200 | sales@enviroflexpumps.com



PUMP SPECIFICATIONS

PUMP (HOSE) BORE

10mm (1/4")

MAX WORKING PRESSURE

7.5 BarG (109 PSI)

DISPLACEMENT PER REV

0.05 L/REV (0.013 US GAL/REV)

MAX CONTINUOUS SPEED

70 RPM

MAX INTERMITTENT SPEED

100 RPM

SOLIDS HANDLING


Soft: 8mm (5/16") Hard: 1.5mm (1/16")

MAX SUCTION LIFT (WATER)

9 Meters (27 Feet)


AVERAGE STANDARD WEIGHT

30 KG (66 LB)

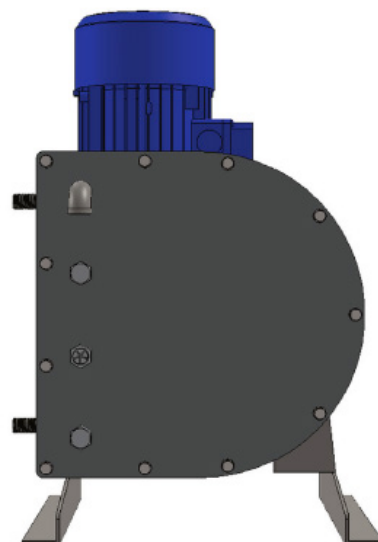

L10 PERFORMANCE CURVE

ZONE KEY: Continuous Duty Intermittent Duty**

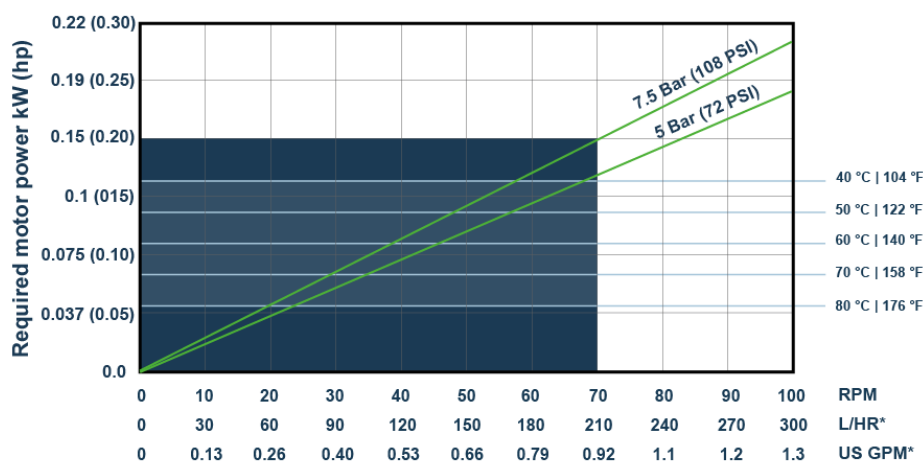

*Optimal flow rates stated **Intermittent duty defined as 1 operation followed by a 20 minute rest


RUBBER HOSE MATERIALS

- ☐ Natural (NR)
- ☐ Food Grade Natural (FGNR)
- ☒ Nitrile Buna (NBR)
- ☒ Food Grade Nitrile Buna (FGNBR)
- ☒ Ethylene Propylene Diene Monomer (EDPM)
- ☒ Chlorosulfonated Polyethylene (CSM)
- ☒ Fluorine/Fluoro (FKM)

CONNECTION OPTIONS

- BSPP (standard)
- ANSI Class 150 Flanged
- PN16 Flanged
- Tri-Clamp*
- IDF
- RJT
- Camlock

GA DRAWING

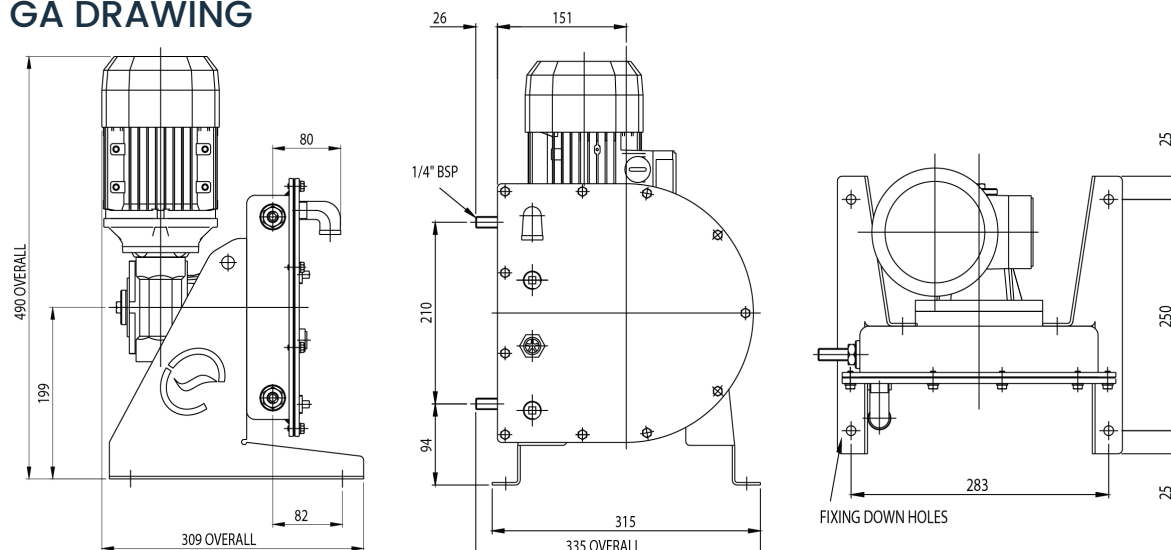

UK
CA