

L20 Peristaltic Pump

www.enviroflexpumps.com | +44 (0) 1332 913 200 | sales@enviroflexpumps.com



PUMP SPECIFICATIONS

PUMP (HOSE) BORE

20mm (3/4")

MAX WORKING PRESSURE

10 BarG (145 PSI)

DISPLACEMENT PER REV

0.23 L/REV (0.061 US GAL/REV)

MAX CONTINUOUS SPEED

90 RPM

MAX INTERMITTENT SPEED

100 RPM

SOLIDS HANDLING

Soft: 16mm (5/8") Hard: 3mm (1/8")

MAX SUCTION LIFT (WATER)


9 Meters (27 Feet)

AVERAGE STANDARD WEIGHT

65 KG (143 LB)



L20 PERFORMANCE CURVE

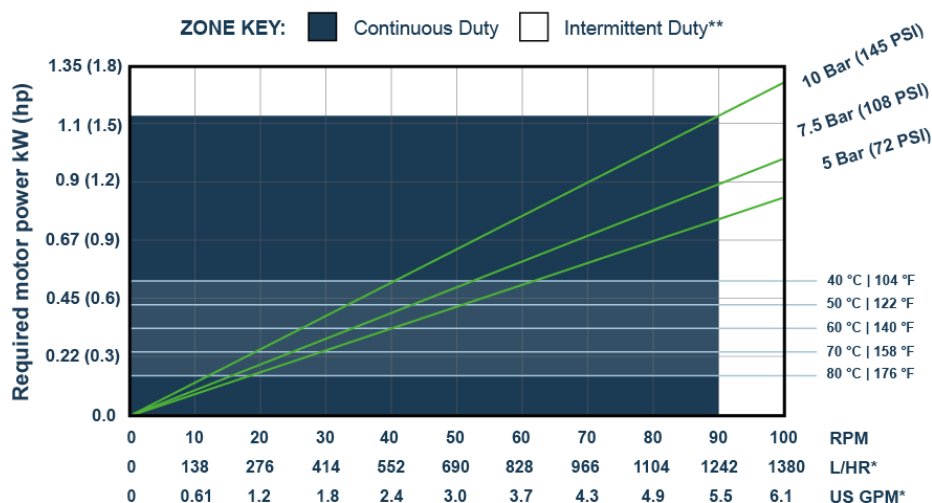


RUBBER HOSE MATERIALS

- Natural (NR)
- Food Grade Natural (FGNR)
- Nitrile Buna (NBR)
- Food Grade Nitrile Buna (FGNBR)
- Ethylene Propylene Diene Monomer (EDPM)
- Chlorosulfonated Polyethylene (CSM)
- Fluorine/Fluoro (FKM)

CONNECTION OPTIONS

- BSPT (standard)
- ANSI Class 150 Flanged
- PN16 Flanged
- Tri-Clamp*
- IDF
- RJT
- Camlock

GA DRAWING

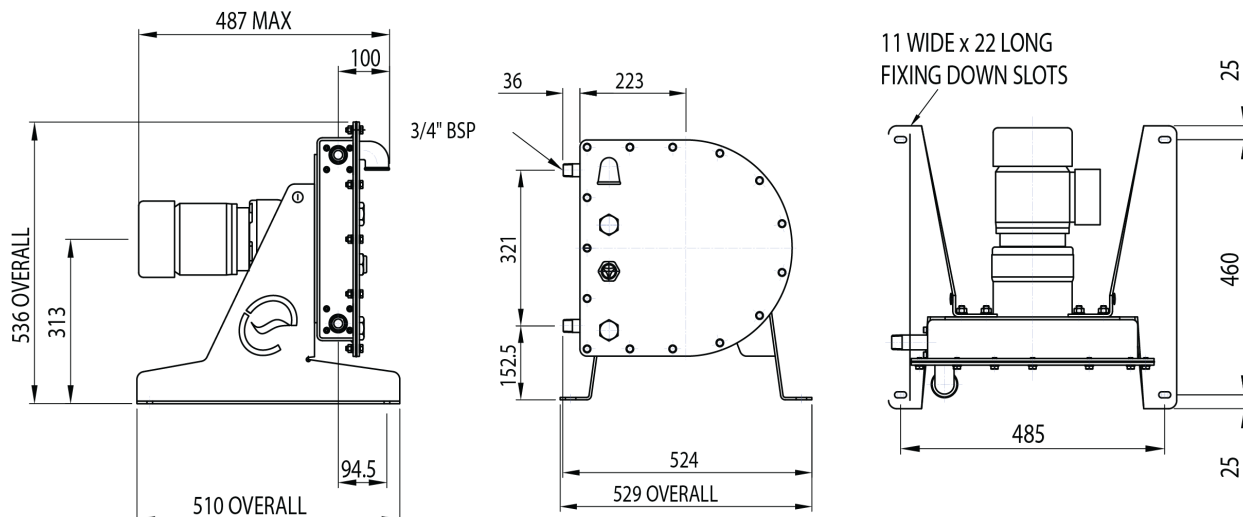

**UK
CA**