

L32 Peristaltic Pump

www.enviroflexpumps.com | +44 (0) 1332 913 200 | sales@enviroflexpumps.com



PUMP SPECIFICATIONS

PUMP (HOSE) BORE
32mm (1-1/2")

MAX WORKING PRESSURE
10 BarG (145 PSI)

DISPLACEMENT PER REV
0.95 L/REV (0.251 US GAL/REV)

MAX CONTINUOUS SPEED
70 RPM

MAX INTERMITTENT SPEED
80 RPM

SOLIDS HANDLING
Soft: 25mm (1") Hard: 5mm (3/16")

MAX SUCTION LIFT (WATER)
9 Meters (27 Feet)

AVERAGE STANDARD WEIGHT
155 KG (341 LB)




RUBBER HOSE MATERIALS

- Natural (NR)
- Food Grade Natural (FGNR)
- Nitrile Buna (NBR)
- Food Grade Nitrile Buna (FGNBR)
- Ethylene Propylene Diene Monomer (EDPM)
- Chlorosulfonated Polyethylene (CSM)
- Fluorine/Fluoro (FKM)

CONNECTION OPTIONS

- BSPT (standard)
- ANSI Class 150 Flanged
- PN16 Flanged
- Tri-Clamp*
- IDF
- RJT
- Camlock

L32 PERFORMANCE CURVE

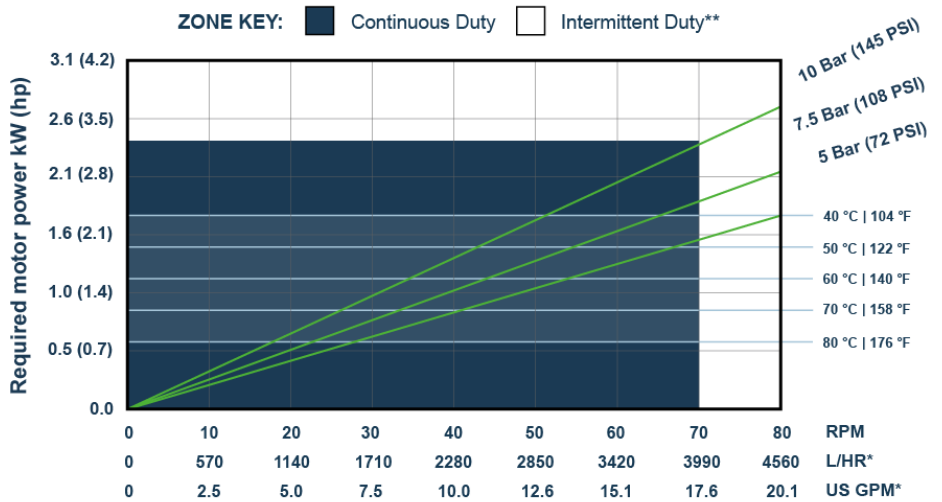

GA DRAWING

