

L65 Peristaltic Pump

www.enviroflexpumps.com | +44 (0) 1332 913 200 | sales@enviroflexpumps.com



PUMP SPECIFICATIONS

PUMP (HOSE) BORE

65mm (2 1/2")

MAX WORKING PRESSURE

10 BarG (145 PSI)

DISPLACEMENT PER REV

7.1 L/REV (1.876 US GAL/REV)

MAX CONTINUOUS SPEED

45 RPM

MAX INTERMITTENT SPEED

60 RPM

SOLIDS HANDLING


Soft: 51mm (2") Hard: 10mm (3/8")

MAX SUCTION LIFT (WATER)


9 Meters (27 Feet)

AVERAGE STANDARD WEIGHT

375 KG (825 LB)

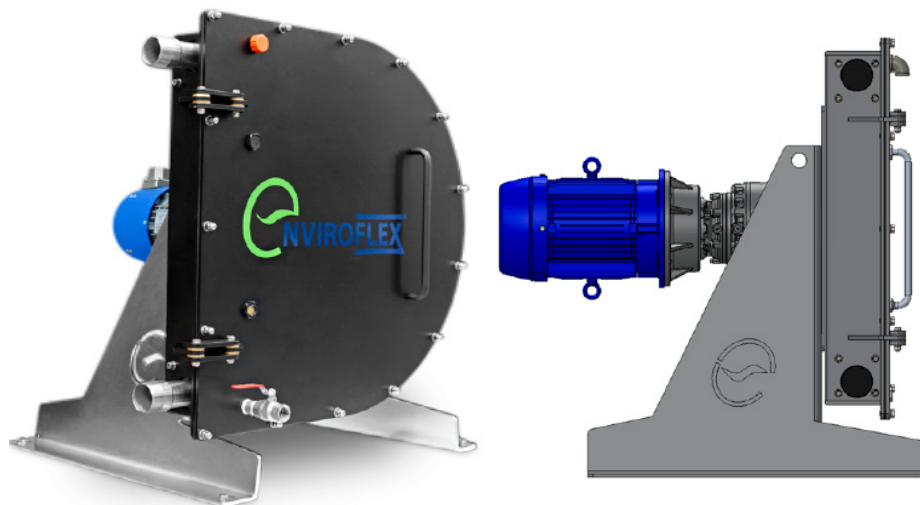

L65 PERFORMANCE CURVE

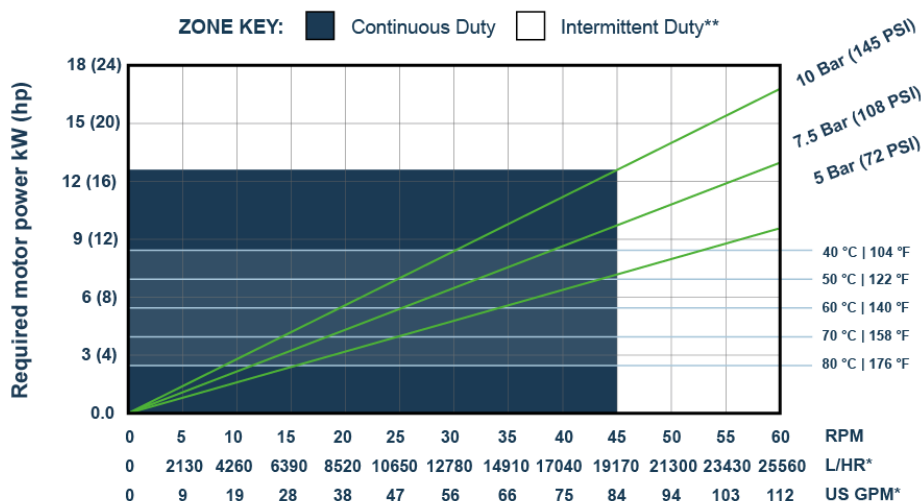


RUBBER HOSE MATERIALS

- ☐ Natural (NR)
- ☐ Food Grade Natural (FGNR)
- ☒ Nitrile Buna (NBR)
- ☒ Food Grade Nitrile Buna (FGNBR)
- ☒ Ethylene Propylene Diene Monomer (EDPM)
- ☒ Chlorosulfonated Polyethylene (CSM)
- ☒ Fluorine/Fluoro (FKM)

CONNECTION OPTIONS

- BSPT (standard)
- ANSI Class 150 Flanged
- PN16 Flanged
- Tri-Clamp*
- IDF
- RJT
- Camlock

GA DRAWING

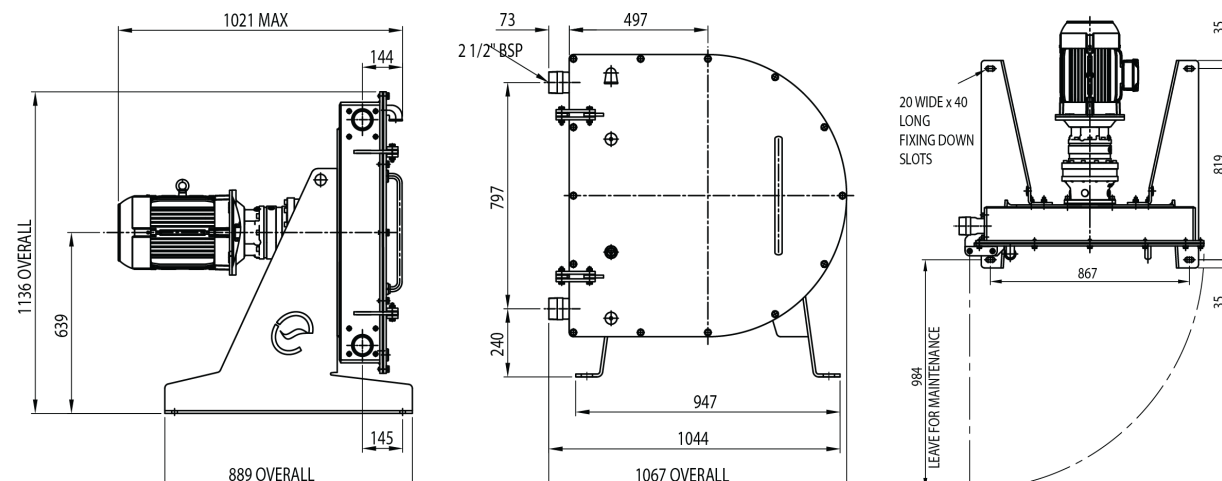

UK
CA